


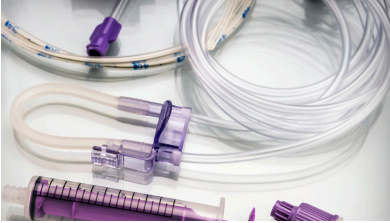





GEON® POLYMAX™ THERMOPLASTIC ELASTOMERS

Series	Features	Core Products*	Applications
P Series 	Standard/Polyolefin Bonding <ul style="list-style-type: none"> • Single Component Molding • Polypropylene Over molding • Processability / Weatherability • Durometer Range: 15A – 90A 	P31-247A-9S (30A)	Buttons, PP OM
		P31-466-A (45A)	Toothbrush, PP OM
		P31-491Q-2 (60A)	Razors
		P3870 (70A)	General Purpose, PP OM
		P3877 (80A)	General Purpose, PP OM
A Series 	Engineering Plastics Over Mold <ul style="list-style-type: none"> • Abrasion Resistance • Food/Medical Grades • UV/Outdoor Grades • Durometer Range: 10A – 80A 	A9735C (30A)	Clear ABS OM Grade
		A01-386 (45A)	Toothbrush, PC OM
		A9950C (50A)	General purpose, PC/ABS OM
		A9860M (60A)	General purpose, PC/ABS OM
		A9880H (80A)	High Abrasion, PC/ABS OM
D Series 	Extrusion Grades <ul style="list-style-type: none"> • Good Melt Strength, Abrasion Resistance • Low Compression Set • Easy Processing • Durometer Range: 15A – 90A 	D6935 (35A)	Extrusion, SEBS
		D6945 (45A)	Extrusion, SEBS
		D6960 (60A)	Extrusion, SEBS
		D01-216A-1 (72A)	Extrusion, SEBS
		D6990 (90A)	Extrusion, SEBS
C Series 	Clear & Ultra Soft <ul style="list-style-type: none"> • Excellent Clarity • Ultra Soft TPEs • Soft & Cushioning Comfort • Durometer Range: 5A – 80A 	C4905 (5A)	Clear, Injection
		C4920 (20A)	Clear, Injection
		C4940 (40A)	Clear, Injection
		C4960 (60A)	Clear, Injection
		C4880 (80A)	Clear, Injection
Speciality 	Performance <ul style="list-style-type: none"> • Elasticity & Resilience • Low Compression Set • Abrasion Resistance • Durometer Range: 30A – 95A 	A04-504-1B (70A)	PVC OM
		F7880 (80A)	Fire Resistant Grade
		N01-097C (55A)	Nylon OM
		P31-468-A (33A)	LLDPE OM
		P31-493G-4X (60A)	PS OM



SALES@GEON.COM • 1-800-GET-GEON • GEON.COM

Copyright © 2025, GEON Performance Solutions. GEON makes no representations, guarantees, or warranties of any kind with respect to the information contained in this document about its accuracy, suitability for particular applications, or the results obtained or obtainable using the information. Some of the information arises from laboratory work with small-scale equipment which may not provide a reliable indication of performance or properties obtained or obtainable on larger-scale equipment. Values reported as "typical" or stated without a range do not state minimum or maximum properties; consult your sales representative for property ranges and min/max specifications. Processing conditions can cause material properties to shift from the values stated in the information. GEON makes no warranties or guarantees respecting suitability of either GEON's products or the information for your process or end-use application. You have the responsibility to conduct full-scale end-product performance testing to determine suitability in your application, and you assume all risk and liability arising from your use of the information and/or use or handling of any product. **GEON MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE**, either with respect to the information or products reflected by the information. This literature shall NOT operate as permission, recommendation, or inducement to practice any patented invention without permission of the patent owner